

Mounted Bearings

4 Bolt Flange



PA FV polyamide housing

- Housing in reinforced polyamide PA FV resin (black)
- High quality ball bearing in chrome steel
- Protection cover in polypropylene PP (orange or yellow)
- Seal and O-Ring in NBR rubber (black)
- Ball type nickel plated brass greasing nipple
- Reinforcing bushings on mounting holes and washers in stainless steel AISI 304
- Stainless steel AISI 303 safety ring
- Bottom seal in PVC (black).

Continuous operating temperature

In air : -4 to + 140 °F (- 20 to + 60 ° C).

Maximum allowed misalignment: 2°.


Dessins

CAD Disponibles


Communiquez avec CRS/VAMIC
pour obtenir les dessins CAD des
composantes, ou visitez www.crsvamic.ca

*CAD Drawings
Available*

Contact CRS/VAMIC to obtain
CAD drawings of components,
or go to www.crsvamic.ca

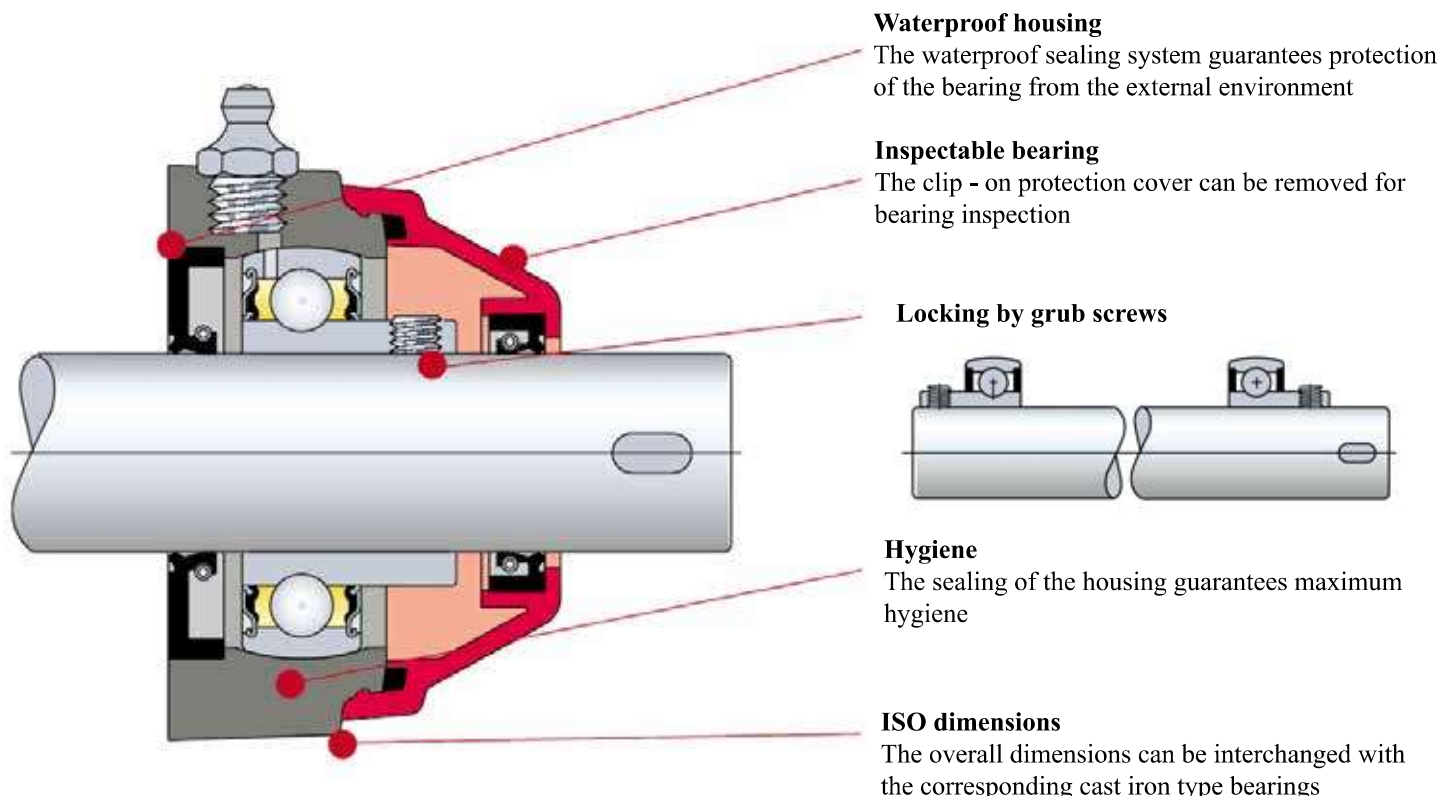



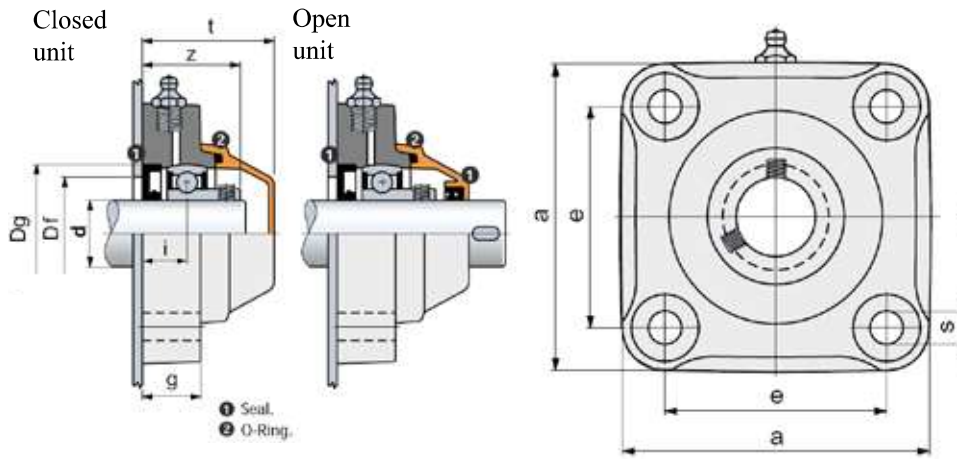



Mounted Bearings



Shaft dia. d	e	a	s	g	i	z	t	Dg	Df		Brg load in lbs	
									Min	Max	Dyn.	Stat.
25mm	2.756	3.858	0.433	0.886	0.661	1.429	1.949	2.047	1.772	1.969	2429	1574
1"	2.756	3.858	0.433	0.886	0.661	1.429	1.949	2.047	1.772	1.969	2429	1574
1-1/4"	3.268	4.331	0.433	1.024	0.787	1.614	2.165	2.441	1.969	2.362	3396	2249
1-1/2"	3.268*	4.331	0.433	1.024	0.748	1.890	2.598	3.150	2.559	3.071	5083	3531

All dimensions are in inches.

* Special, small housing size, 206 equiv.

Shaft dia. d	Bearings series with black reinforced polyamide housing		Codes for closed covers c/w o'ring		Codes for open covers c/w seal and o'ring	
	Bearing units with seal and orange closed cover	Bearing units with seals and orange open cover	Orange	Yellow	Orange	Yellow
						
25mm	64573	64623	63194	609653	691572	609663
1"	693942	693952	63194	609653	691572	609663
1-1/4"	691002	691032	63154	609673	691582	609683
1-1/2"	691022	691052	600882	609713	691602	609723