


Product Guides & Supports

- All our guide rails are made with stainless steel AISI304 with white UHMWPE extruded inserts. Standard available length is : 10 feet (120 inches) / 3.048 meters
- Stainless steel sheet 0.08" thick gives a higher load strength to the rail, reducing the deflection caused by the load. Minimum bend radius is 5.71".
- Although guide rails can be used in a wide range of applications, certain styles are designed for specific conditions.
- Linear expansion coefficient:
 $4 \times 10^{-5} \text{ } ^\circ\text{C}^{-1}$ $2.2 \times 10^{-5} \text{ } ^\circ\text{F}^{-1}$

Guide rail round


● Part # **CVR-10**

Tolerance: +/- 0.030




Standard length is 10 feet



Round top style

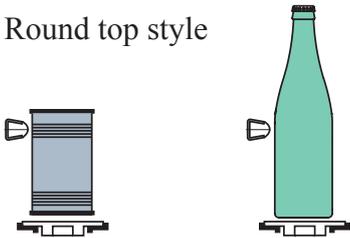

Narrow flat top style

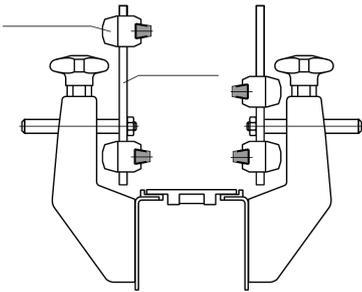



Deflection of part #CVR-10, CVR-12

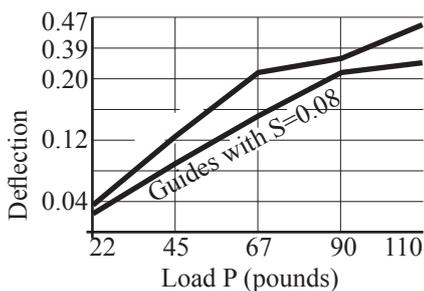

Guide rail flat

● Part # **CVR-12**

Tolerance: +/- 0.030

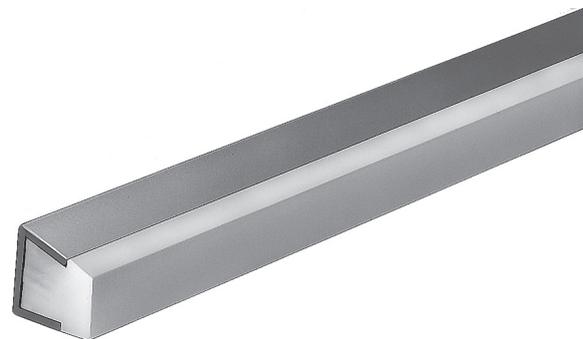

Standard length is 10 feet