



HabasitLINK® Radius 1-1/2" Pitch Belting M3892 Raised Deck 1.5"

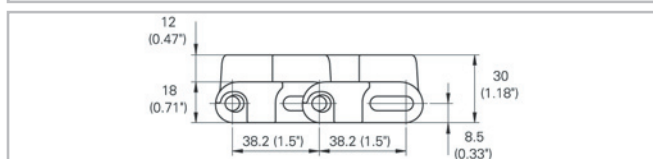

Description

- Imperial belt width
- For radius and straight conveying, ideal for case handling (collapse factor 2.2)
- 45% open area; 82% open contact area; largest opening 10.7x20.6 mm (0.42"x0.81")
- Indent of 32 mm (1 1/4")
- Excellent for shifting goods sideways on and off the belt with simple conveyor design
- Food approved materials available
- Rod diameter 6 mm (0.24")
- Smart Fit rod retention
- Large distance between wearstrips possible
- "Open window" sprockets

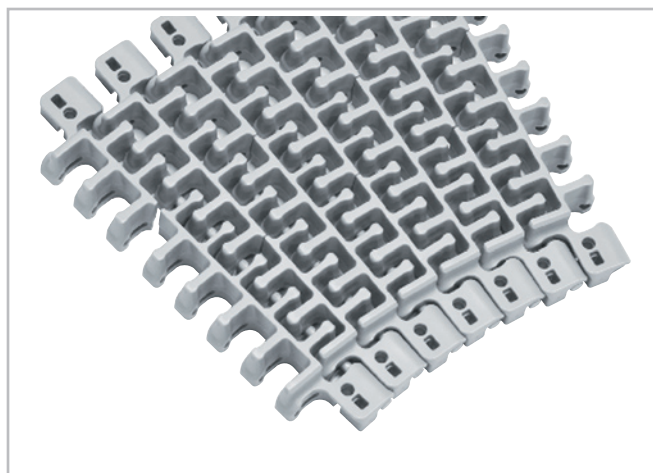

Belt data

Belt material		PP		POM
Rod material		POM	PA	POM
Nominal tensile strength F'_N straight run	N/m	23000	23000	32000
	lb/ft	1575	1575	2192
Nominal tensile strength F_N in curve ⁽¹⁾	N	2000	2000	2400
	lbf	450	450	540
Temperature range	°C	5 - 93	5 - 105	-40 - 93
	°F	40 - 200	40 - 220	-40 - 200
Belt weight m_B	kg/m²	11.5	11.5	17.1
	lb/sqft	2.36	2.36	3.50

⁽¹⁾ For $b_0 > 600$ mm (23.6") higher values admissible.

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without sideguards or hold down devices (minimum)		Backbending radius for elevators with sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
60	2.4	100	4	150	6	150	6	250	10

Use the largest possible backbending radius for elevators with side guards or hold down devices.

HabasitLINK® Radius 1-1/2" Pitch Belting M3892 Raised Deck 1.5"



Standard range of belt widths b_0 and collapse factor Q ($R_{min} = Q \times b_0$) for nominal factor 2.2

Belt width mm (nom.)	254	304	356	406	457	508	559	609	660	711	762	813	864	914
Belt width inch (nom.)	10	12	14	16	18	20	22	24	26	28	30	32	34	36
Coll.fact. Q	1.86	1.92	1.96	1.99	2.02	2.03	2.05	2.06	2.07	2.08	2.09	2.09	2.10	2.10
Belt width mm (nom.)	965	1016	1067	1117	1168	1219	1270							
Belt width inch (nom.)	38	40	42	44	46	48	50							
Coll.fact. Q	2.11	2.11	2.11	2.12	2.12	2.12	2.13							

Belt widths larger than 1270 mm (50") are not recommended; *please contact Habasit*.
Real belt widths are in most cases 0.1% to 0.3% smaller.

Standard belt widths in increments of 2.0" (50.8 mm). Non-standard widths are offered in increments of 1.0" (25.4 mm). Smallest possible width 8.0" (203.2 mm).

For detailed material properties refer to the HabasitLINK® Engineering Guidelines or contact your Habasit representative.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasitLINK® Engineering Guidelines.

Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.
All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.
BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.